



SERVING THE TRADE SINCE 1954





SCAFFOLDING PANELS AND ACCESSORIES

MANUFACTURED FROM HIGH STRENGTH STEEL TUBE
PERIMETER JOINTS COPED AND WELDED
PLATED/PAINTED FINISH ON PANEL LOCKS
ALL PANELS DRILLED FOR EASY PINNING
ALL PANELS HAVE POWDER-COATED FINISH

ALL SCAFFOLD TUBING IS 1.69" OUTSIDE
DIAMETER WITH .095" WALL UNLESS
STATED OTHERWISE

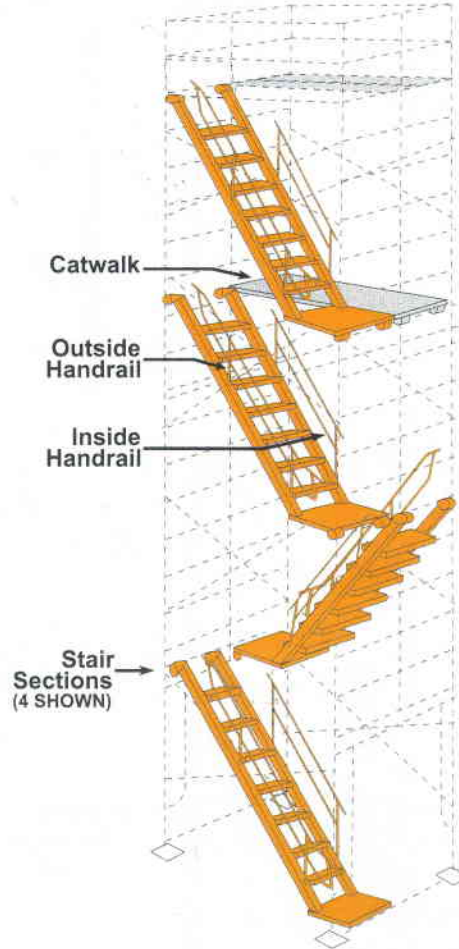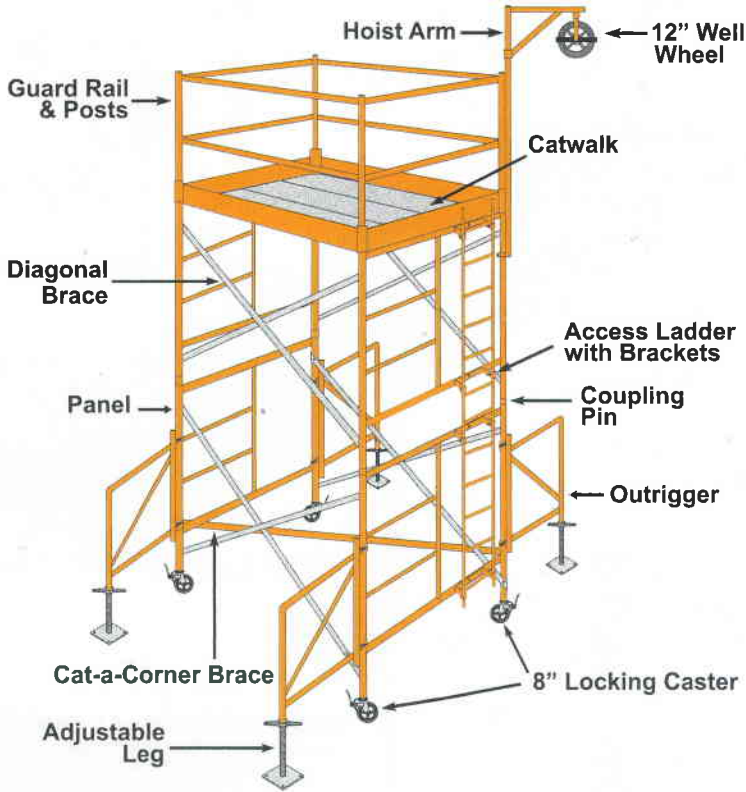




2 OF THESE + 2 OF THESE + 4 OF THESE = BASIC UNIT
COUPLING PINS WITH
SPRING RETAINER INSTALLED

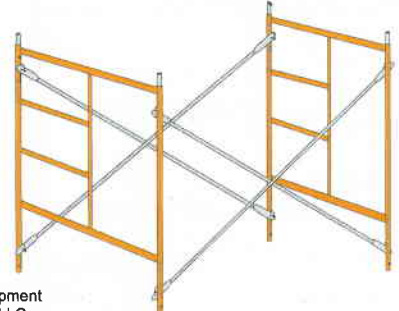






Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.

7475 N.W. 63rd STREET • MIAMI, FL 33166-3603
MIAMI (305) 592-5940 • WATS 1-800-831-4564 • FAX (305) 592-2793
WEBSITE - <http://www.AbleExport.com>
LINKS: www.AbleBuilders.com, www.Escora.com, www.Andamio.ws
E-MAIL: Sales@AbleExport.com

PANELS

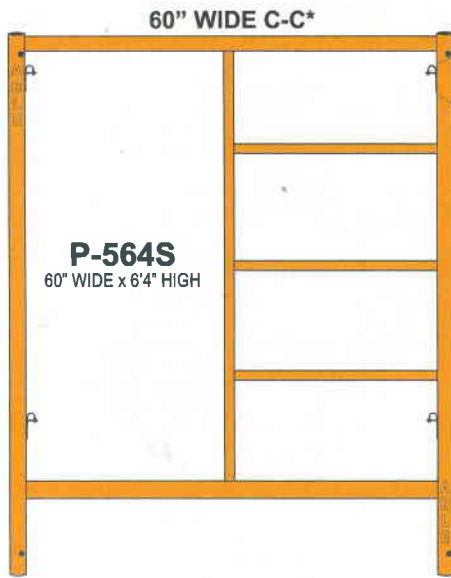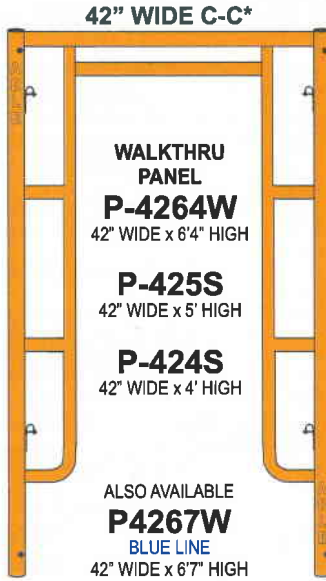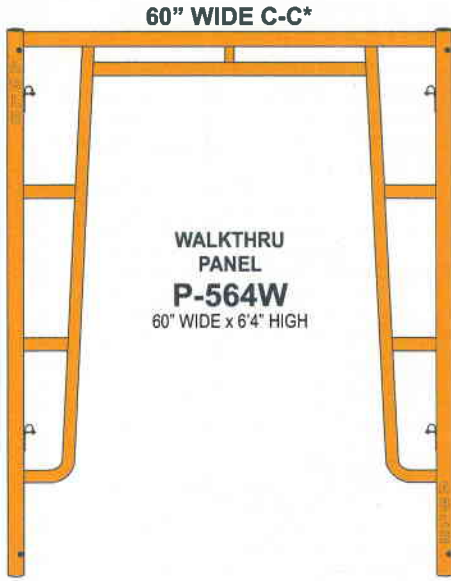

COUPLING PIN WITH
SPRING RETAINER
INSTALLED

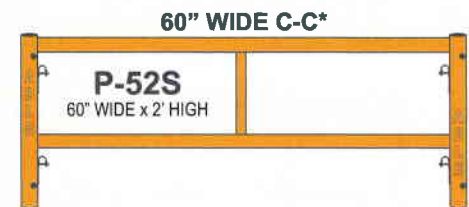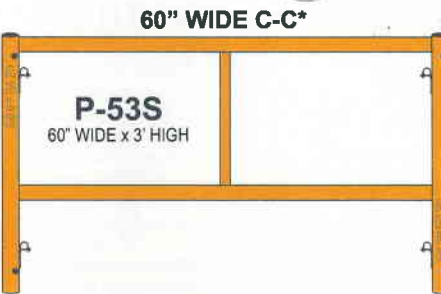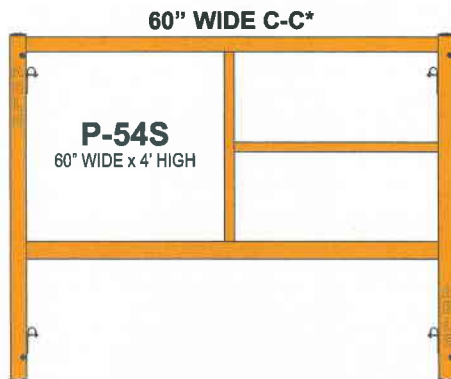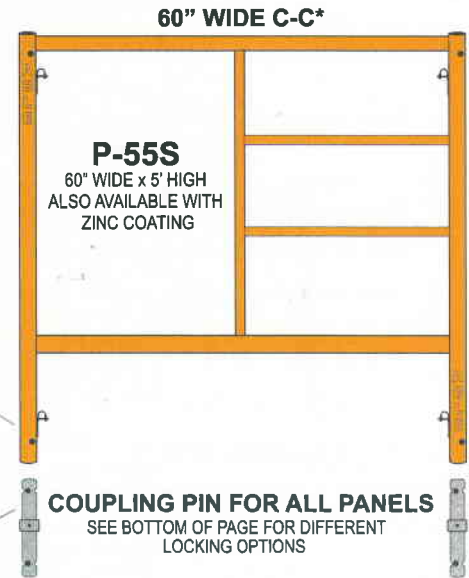

*C-C = Center to Center

Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.



TUBING CLAMPS AND ACCESSORIES, MORTAR BOARD AND BAKER / PERRY STYLE PRODUCTS FOR INDOOR USE.

TUBE & CLAMP



TC-RA (I-BOLT)
RIGHT ANGLE



TC-S (I-BOLT)
SWIVEL




TC-RAT (T-BOLT)
RIGHT ANGLE




TC-ST (T-BOLT)
SWIVEL



TC-SW
SCAFFOLD WRENCH
REVERSING RATCHET




TC-SJP
EXPANDABLE JOINT PIN



MBS
MORTAR BOARD
STAND

THE BASIC "ALL PURPOSE UNIT" (APUW)




Featuring the integrated spring-loaded pin system for fast assembly and "no surprises" operation.

All-steel construction • 6' long platform of 5/8" plywood, adjusts every 4" • Locking, swivel casters are 5" weight-over-center • Built to easily fit through standard doors. (Guardrails and outriggers, as shown below, are sold separately.) 1,000 lb capacity.

APUGRS

SET OF 4 GUARDRAILS:
2 FIXED SIDE RAILS AND
2 END RAIL GATES

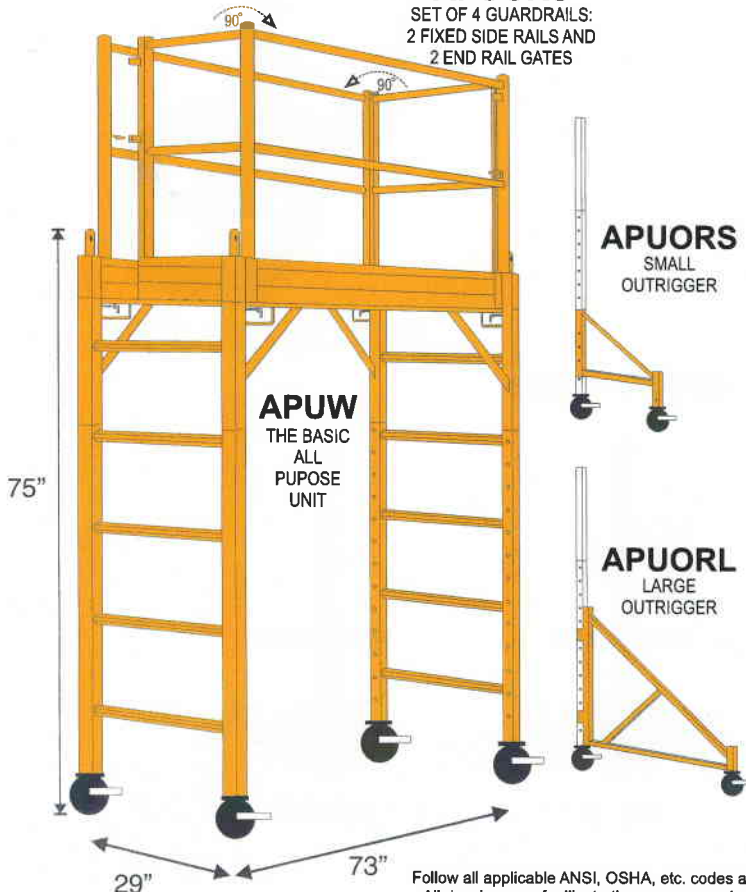

PORTABLE FOLD-UP MINI-SCAFFOLDS



Both the 6' 3" and the 4' 4" models of the Portable Fold-Up Mini-Scaffold feature strong 1" (2.5 cm) outside diameter tubular steel frames and an electrostatically applied epoxy coating.

The 6" model is 75" tall, including the housing for the 5" wheels, 73" wide and 29" deep. Three 14 gauge (2 mm) solid steel scaffold planks are standard.

The 4" model is 52" tall, including the housing for the 4" wheels, 42.5" wide and 21" deep. Two 14 gauge (2 mm) solid steel planks.

Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.




ACCESSORIES

SIDE BRACKET



SB-20
SB-24
SB-30


OUTRIGGER



OR-1

**CATWALK
CW-7A**


7' SPAN
Aluminum Frame
Plywood Deck (Replaceable)

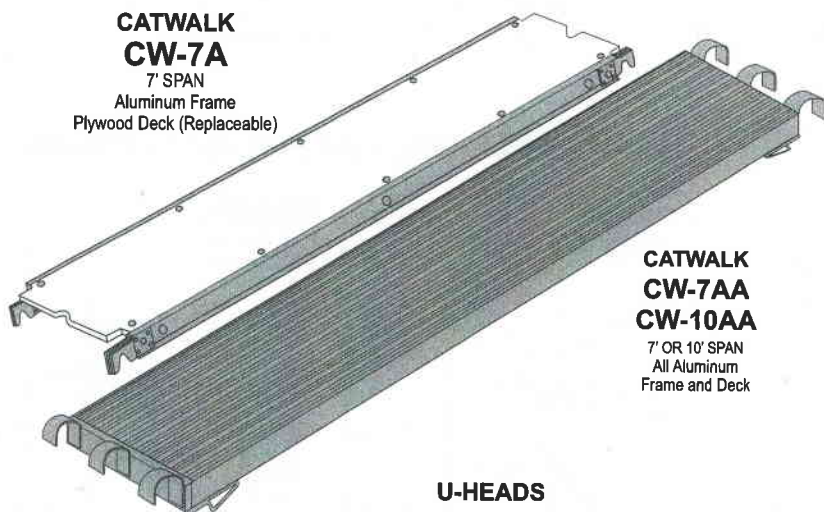

**CATWALK
CW-7AA
CW-10AA**

7' OR 10' SPAN
All Aluminum
Frame and Deck

U-HEADS




UH-1S
6" x 11"

UH-2S
8.5" x 11"

ACCESS LADDER

AL-5
AL-6

5' OR 6 LADDER

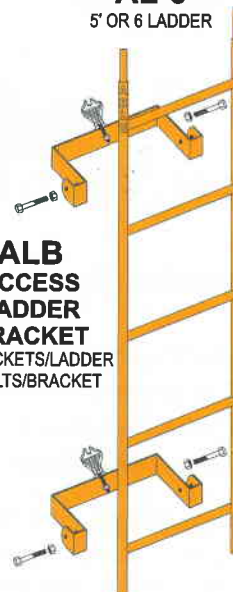

**ALB
ACCESS
LADDER
BRACKET**

2 BRACKETS/LADDER
2 BOLTS/BRACKET




**WELL WHEEL
HA-WW12**

12" heavy duty Well Wheel
for up to 1" rope to hoist
materials.

**HOIST ARM
HA-1**

Fits over coupling pin on frame.
(Maximum capacity = 250 lbs.)
360° swivel.


**8" LOCKING
CASTER
C-8**

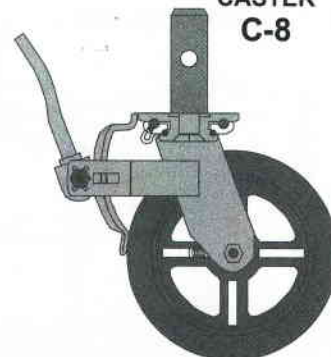


Important Rule: Always lock wheel and pin caster stem before and during use.

ADJUSTABLE LEGS


BASE PLATE




BP-1

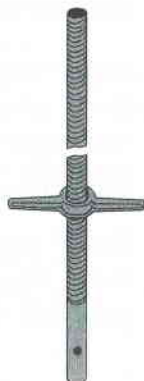

AL-P



AL-S



AL-BP


Follow all applicable ANSI, OSHA, etc. codes and regulations for use of this equipment
All drawings are for illustration purposes only. Copyright © 2016 ABLE Export, LLC.




BRACES

DIAGONAL BRACE

(Legend: "B" for "Brace"- ## inches between locks - 5', 7' or 10' length)

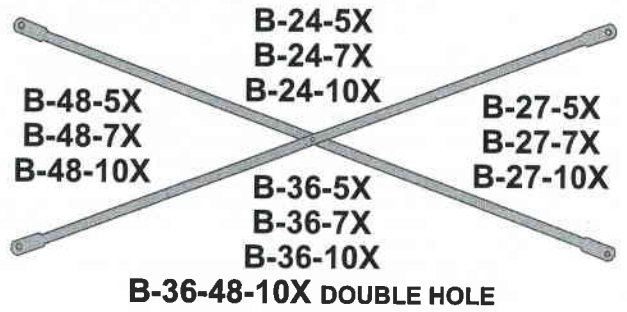

STAIR SECTION
SR-5
SR-64'
 STAIR SECTIONS FOR
 5' AND 64" PANELS

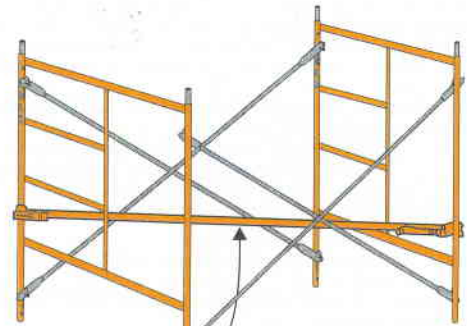


CAT-A-CORNER BRACE
B-57-D

Important Rule: When assembling rolling tower, always use CAT-A-CORNER braces on the panels sections. This prevents the tower from "racking" (getting out of square). CAT-A-CORNER braces must be used at the bottom and at every 20'.

GUARD RAIL
 2', 3', 42", 5', 7' OR 10' SPAN



36" TIE BAR
TBR 36



GUARD RAIL POST

GRPK
 WITH KICKER

GRP
 WITHOUT KICKER

